

# TECHNICAL DATA SHEET

## OXIME



### Neutral Silicone

Promast Oxime is an high performance neutral cure pure silicone sealant which is suitable with sensitive metals and concrete surfaces. Stays flexible at all times and endures weather conditions and has the volume stability.

### TECHNICAL DATA

■ Basis	Neutral
■ Consistency	Thixotropic
■ Curing system	Moisture curing
■ Tack-free time	Ca. 15 mins
■ Skin Formation (20°C/65% R.H.)	3 mm / 24h
■ Hardness (DIN 53505)	22 ± 5 Shore A
■ Density	1,03 gr/lit
■ Temperature resistance (Cured)	-40°C +180°C
■ Elastic recovery (ISO 7389)	> 95%
■ Motility	20%
■ Elongation at break (DIN 53504)	> 450%
■ Application temperature	5°C - 40°C

### APPLICATIONS AREAS

- Bonding and fixing mirrors.
- Leak-proofing application on acid sensitive alkali metal surfaces.
- Sealing the joints around windowpanes.
- Suitable on concrete, brick, steel, chrome, brass, zinc, copper, enamel, epoxy, polyester, PVC, ceramic, tile and glass surfaces.

### SPECIFICATIONS

- Does not crack, does not lose volume .
- It is very durable, permanently maintains its elasticity.
- With the help of high movement capability, it can be used at joints and grouts.
- Does not lose its function at very high or very low temperatures.
- Cures fast. Within hours it reaches to water-proof state.
- It is resistant to UV rays, weather conditions and wear & tear. It can be used both in exteriors and interiors.
- Adheres strongly on common building materials (steel, tile, glass, ceramic, painted wood, polyester, etc.)

# TECHNICAL DATA SHEET

## OXIME

### SAFETY INFORMATION

It contains minor amounts of volatile chemicals. It must not be inhaled and the application ambience must be ventilated if used indoors. Since it may cause irritation to avoid prolonged contact of wet silicone to skin. Hardened silicone does not contain any harmful components.

### SURFACE PREPERATION

- Surfaces which contact with sealant must be clean and dry and not contain any oil, dust or rust.
- Non-porous surfaces must be cleaned in advance with a suitable solvent. Applied solvent must be wept well from the surface without allowing it to evaporate.
- Applying masking tape around the application joints prevents smudging and provides a more aligned application.
- Masking tape must be removed promptly after application.
- Primer is not needed before the application on non-porous surfaces like faience, ceramics and glass.
- Primer use may be required for some metal and plastic types.

### JOINT PREPERATION

- Joint width must be between 6-20 mm.
- Depth of the applied silicone depends on the size of width. Apply 6 mm silicone in the widths with depths up to 12 mm.
- Depth of silicone must be roughly half of its width wider joints.

### APPLICATION METHOD

- Cut the tip of the cartridge and screw the application nozzle to the cartridge.
- Cut the nozzle at a suitable points depending on the thickness of the application joint.
- Place the cartridge to the silicone gun and apply on the desired area.
- Before silicone forms a crust, smoothen the silicone with a thin plastic of wood spatula.
- Clean the smudged silicone with a solvent based cleaner without allowing it to dry. Dried silicone can be cleaned with mechanical methods.


### PACKAGING (Volume)

280 ml cartridge (box of 25 pieces)

### SHELF LIFE

15 months in unopened packaging in a cool and dry storage place at temperatures between +5°C and +25°C.

### COLORS

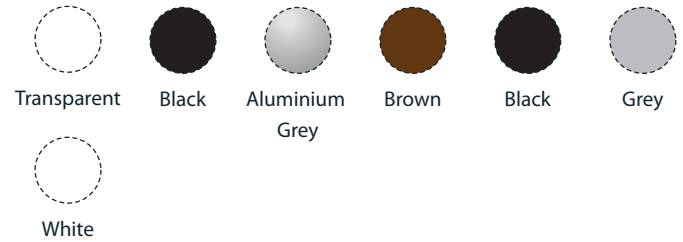

**MANUFACTURER:**  
 PROMAST Kimya San. Tic. A.Ş. Ovacık Mh.  
 Hacıoğlu Sk. No:21 B/0 41140 Başiskele  
 KOCAELİ | TURKEY T: +90 (262) 335 41 82  
 F: +90 (262) 335 41 83